


Choose your B&G Ram

B&G's drive unit range also includes high quality hydraulic rams. These high power, efficient drive unit's delivery maximum power with minimum consumption. Ram drives allow the Power Steer mode on the Pilot to be used in cases of manual steering failure. The range includes rams for boats from 5 to 40 meters (up to 60 tonnes displacement). Use the graph and table to size your hydraulic ram.

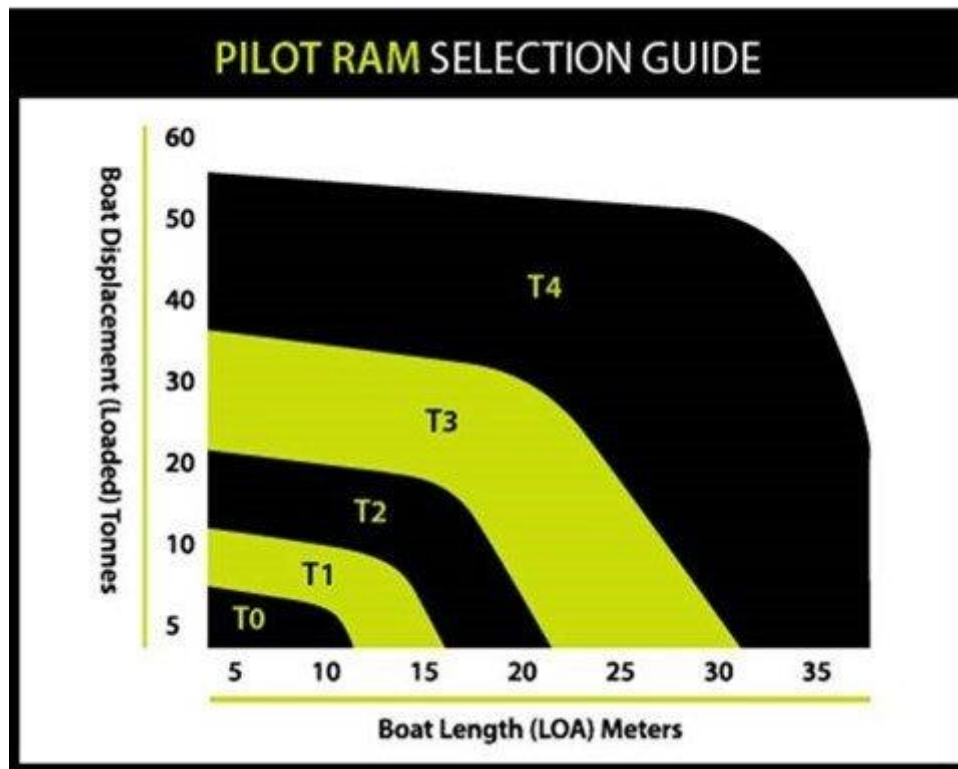

Part Number	Description	Max Boat Size (kg)	Stroke (mm)	Hard Over Time (sec)	Tiller Arm (mm)	Thrust (kg/l)	Rudder Torque (kg/m)	Computer
000-13902-001	T0 12V	9000	200	12	175	350	62	NAC-2
RAM-T1-12V	T1 12V	12000	250	13	213	700	149	NAC-3/H5000
RAM-T2-12V	T2 12V	20000	250	9	213	700	149	NAC-3/H5000
RAM-T2-24V	T2 24V	20000	250	9	213	700	149	NAC-3/H5000
000-13788-001	T3 12V	36000	300	13	257	1100	283	NAC-3/H5000
RAM-T3-24V	T3 24V	36000	300	13	257	1100	283	NAC-3/H5000
RAM-T4-24V	T4 24V	55000	300	15	257	2200	566	NAC-3/H5000

Seven rams are available in the B&G range. When choosing a ram, it's always best to over-specify the drive unit to ensure that it will be able to cope in extreme conditions and to reduce wear and power consumption.